

DOWNLIGHT

7W/12W/15W/25W

○ White ● Black ● Rose gold




KEY ADVANTAGES

1. Using high-quality LED chips with a high color rendering index and high brightness.
2. Paired with LED flicker-free isolation driver, employing the stable solution, high-quality electrolytic capacitor, surge protection resistor, and an all-copper wire transformer. It features overcurrent, overvoltage, and out short circuit protection functions.
3. Alu housing for durable and better heat dissipation

CCT — 2700K 3000K 4000K 6500K

Dimensions

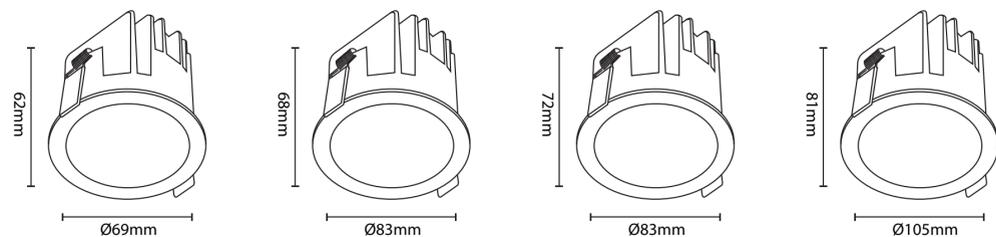

Product Parameter

Model No.	Input Voltage	Power	CRI	Size/mm	Cut-out/mm	Beam Angle
DL01A-7W	AC 100-240V	7W	Ra≥80	Ø69*62mm	Ø55mm	15°/24°/36°
DL01A-12W	AC 100-240V	12W	Ra≥80	Ø83*68mm	Ø75mm	15°/24°/36°
DL01A-15W	AC 100-240V	15W	Ra≥80	Ø83*72mm	Ø75mm	15°/24°/36°
DL01A-25W	AC 100-240V	25W	Ra≥80	Ø105*81mm	Ø95mm	15°/24°/36°

